


# Everglades®

Model: 253cc  
Fuel Capacity: 100 gal


Notes: This information is a performance prediction based off of measured data. It is intended to be used for propulsion comparisons. Performance is predicted with 50 gallons of fuel and 500 lbs of people & gear aboard. The sport station and trolling motor options are not included in this prediction. These options will reduce performance. Range is calculated off of 95% fuel capacity and is shown in statute miles. Performance results can be affected by many factors including vessel loading, option content and weather conditions. The reported performance and fuel consumption are not guaranteed.

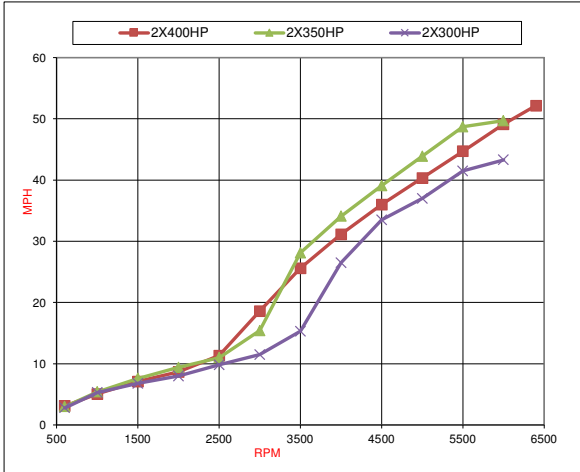

Speed in Miles per Hour


| RPM  | 400HP MPH | 350HP MPH | 300HP MPH |
|------|-----------|-----------|-----------|
| 600  | 3.1       | 3.0       | 2.8       |
| 1000 | 5.1       | 5.4       | 5.3       |
| 1500 | 7.1       | 7.6       | 6.8       |
| 2000 | 8.7       | 9.4       | 8.0       |
| 2500 | 11.4      | 11.0      | 9.8       |
| 3000 | 18.6      | 15.4      | 11.5      |
| 3500 | 25.6      | 28.1      | 15.3      |
| 4000 | 31.2      | 34.1      | 26.5      |
| 4500 | 36.0      | 39.1      | 33.5      |
| 5000 | 40.4      | 43.9      | 37.0      |
| 5500 | 44.7      | 48.7      | 41.5      |
| 6000 | 49.1      | 49.7      | 43.3      |
| 6400 | 52.2      |           |           |

| Acceleration | 400HP Seconds | 350HP Seconds | 300HP Seconds |
|--------------|---------------|---------------|---------------|
| 0-30MPH      | 7.5           | 9.3           | 10.5          |

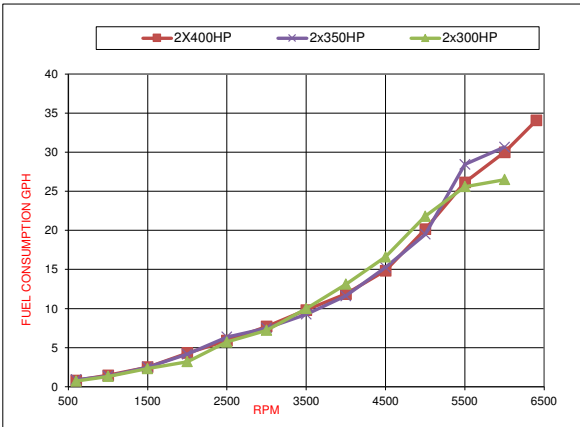

Fuel Consumption in Gallons per Hour

| RPM  | 400HP GPH | 400HP MILES/GAL | 350HP GPH | 350HP MILES/GAL | 300HP GPH | 300HP MILES/GAL |
|------|-----------|-----------------|-----------|-----------------|-----------|-----------------|
| 600  | 0.8       | 3.9             | 0.9       | 3.3             | 0.7       | 4.0             |
| 1000 | 1.5       | 3.5             | 1.4       | 4.0             | 1.3       | 4.1             |
| 1500 | 2.5       | 2.8             | 2.5       | 3.0             | 2.3       | 3.0             |
| 2000 | 4.3       | 2.0             | 4.2       | 2.3             | 3.2       | 2.5             |
| 2500 | 5.9       | 1.9             | 6.4       | 1.7             | 5.7       | 1.7             |
| 3000 | 7.7       | 2.4             | 7.5       | 2.1             | 7.2       | 1.6             |
| 3500 | 9.8       | 2.6             | 9.3       | 3.0             | 10.0      | 1.5             |
| 4000 | 11.9      | 2.6             | 11.6      | 2.9             | 13.1      | 2.0             |
| 4500 | 14.9      | 2.4             | 15.3      | 2.6             | 16.6      | 2.0             |
| 5000 | 20.2      | 2.0             | 19.5      | 2.3             | 21.8      | 1.7             |
| 5500 | 26.2      | 1.7             | 28.5      | 1.7             | 25.6      | 1.6             |
| 6000 | 30.0      | 1.6             | 30.7      | 1.6             | 26.5      | 1.6             |
| 6400 | 34.1      | 1.5             |           |                 |           |                 |

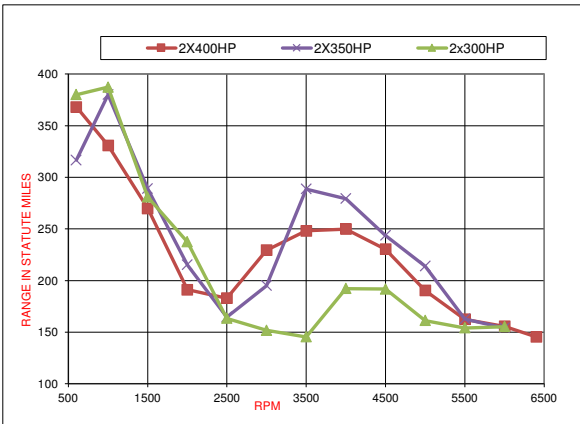

Range in Statute Miles

| RPM  | 400HP Miles | 350HP Miles | 300HP Miles |
|------|-------------|-------------|-------------|
| 600  | 368         | 317         | 380         |
| 1000 | 331         | 380         | 387         |
| 1500 | 270         | 289         | 281         |
| 2000 | 191         | 215         | 238         |
| 2500 | 183         | 165         | 163         |
| 3000 | 229         | 195         | 152         |
| 3500 | 248         | 289         | 145         |
| 4000 | 250         | 279         | 192         |
| 4500 | 230         | 244         | 192         |
| 5000 | 190         | 214         | 161         |
| 5500 | 162         | 163         | 154         |
| 6000 | 155         | 154         | 155         |
| 6400 | 145         |             |             |